

650V/3A Silicon Carbide Power Schottky Barrier Diode

Features

- Zero Reverse Recovery Current
- Zero Forward Recovery Voltage
- Positive Temperature Coefficient on V_F
- Temperature-independent Switching
- 175°C Operating Junction Temperature


V_{RRM}	=	650	V
$I_F (T_C \leq 135^\circ\text{C})$	=	4	A
Q_C	=	5.4	nC

Benefits

- Replace Bipolar with Unipolar Device
- Reduction of Heat Sink Size
- Parallel Devices Without Thermal Runaway
- Essentially No Switching Losses

Applications

- Switch Mode Power Supplies
- Power Factor Correction
- Motor drive, PV Inverter, Wind Power Station

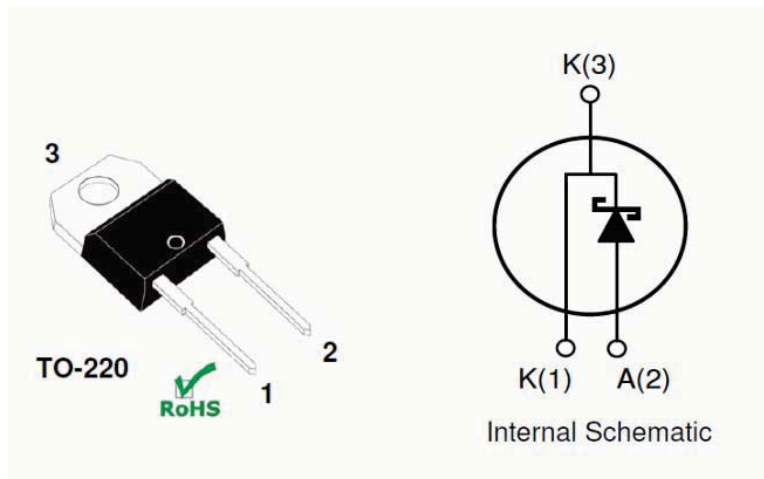

Part No.	Package Type	Marking
SC3S06503A	TO-220-2 pin	SC06503

Maximum Ratings

Symbol	Parameter	Value	Unit	Test Conditions	Note
V_{RRM}	Repetitive Peak Reverse Voltage	650	V	$T_C = 25^\circ\text{C}$	
V_{RSM}	Surge Peak Reverse Voltage	650	V	$T_C = 25^\circ\text{C}$	
V_R	DC Blocking Voltage	650	V	$T_C = 25^\circ\text{C}$	
I_F	Forward Current	8 4 2	A	$T_C \leq 25^\circ\text{C}$ $T_C \leq 135^\circ\text{C}$ $T_C \leq 161^\circ\text{C}$	
I_{FSM}	Non-Repetitive Forward Surge Current	20	A	$T_C = 25^\circ\text{C}$, $t_p = 8.3\text{ms}$, Half Sine Wave	
P_{tot}	Power Dissipation	39	W	$T_C = 25^\circ\text{C}$	Fig.3
T_C	Maximum Case Temperature	161	$^\circ\text{C}$		
T_J, T_{STG}	Operating Junction and Storage Temperature	-55 to 175	$^\circ\text{C}$		

Electrical Characteristics

Symbol	Parameter	Typ.	Max.	Unit	Test Conditions	Note
V_F	Forward Voltage	1.4 1.7	1.65 2.3	V	$I_F = 2\text{A}$, $T_J = 25^\circ\text{C}$ $I_F = 2\text{A}$, $T_J = 175^\circ\text{C}$	Fig.1
I_R	Reverse Current	1 5	10 100	μA	$V_R = 650\text{V}$, $T_J = 25^\circ\text{C}$ $V_R = 650\text{V}$, $T_J = 175^\circ\text{C}$	Fig.2
C	Total Capacitance	125 12 10	/	pF	$V_R = 0\text{V}$, $T_J = 25^\circ\text{C}$, $f = 1\text{MHz}$ $V_R = 200\text{V}$, $T_J = 25^\circ\text{C}$, $f = 1\text{MHz}$ $V_R = 400\text{V}$, $T_J = 25^\circ\text{C}$, $f = 1\text{MHz}$	Fig.5
Q_C	Total Capacitive Charge	5.4	/	nC	$V_R = 650\text{V}$, $I_F = 2\text{A}$ $di/dt = 200\text{A}/\mu\text{s}$, $T_J = 25^\circ\text{C}$	Fig.4

Thermal Characteristics

Symbol	Parameter	Typ.	Unit	Note
$R_{\theta JC}$	Thermal Resistance from Junction to Case	3.8	$^\circ\text{C}/\text{W}$	Fig.6
$R_{\theta JA}$	Thermal Resistance from Junction to Ambient	80	$^\circ\text{C}/\text{W}$	
T_{sold}	Soldering Temperature	260	$^\circ\text{C}$	

RATING AND CHARACTERISTICS CURVES (SC3S06503A)

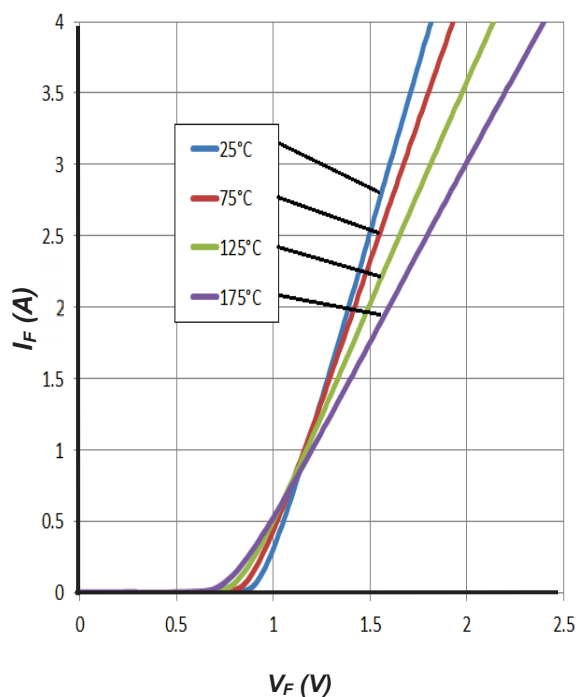


Figure 1. Forward Characteristics

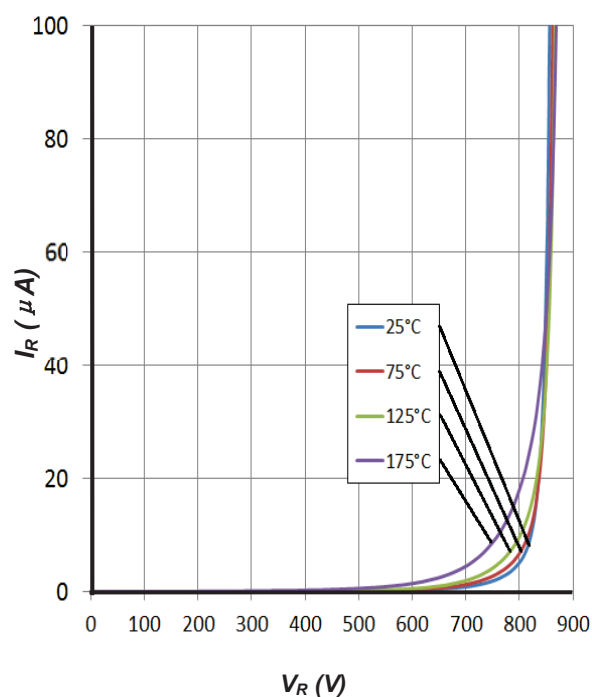


Figure 2. Reverse Characteristics

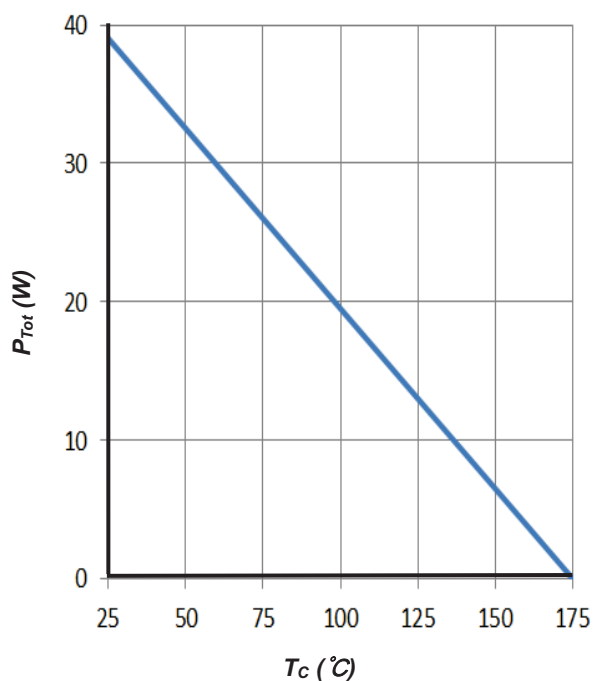


Figure 3. Power Derating

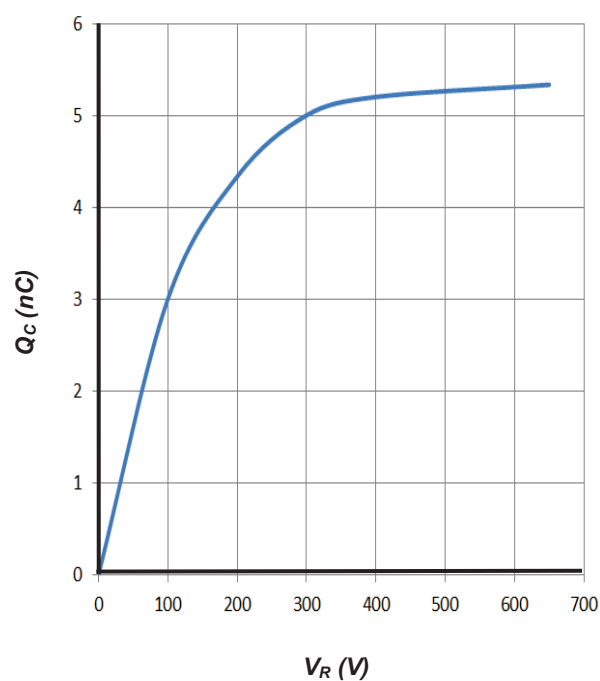


Figure 4. Total Capacitive Charge vs. Reverse Voltage

RATING AND CHARACTERISTICS CURVES (SC3S06503A)

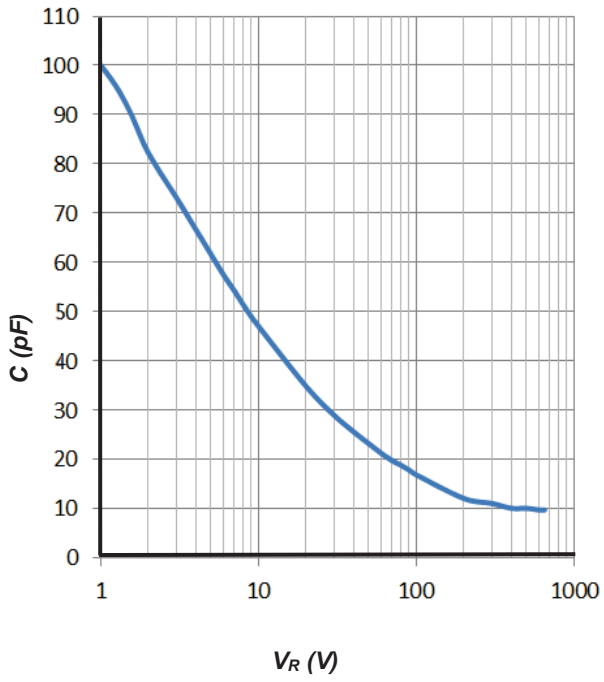


Figure 5. Total Capacitance vs. Reverse Voltage


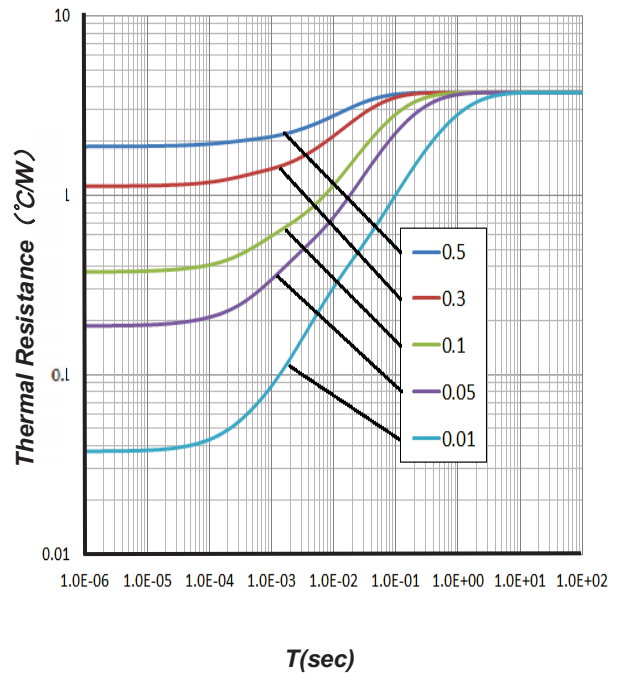


Figure 6. Transient Thermal Impedance

Package TO-220

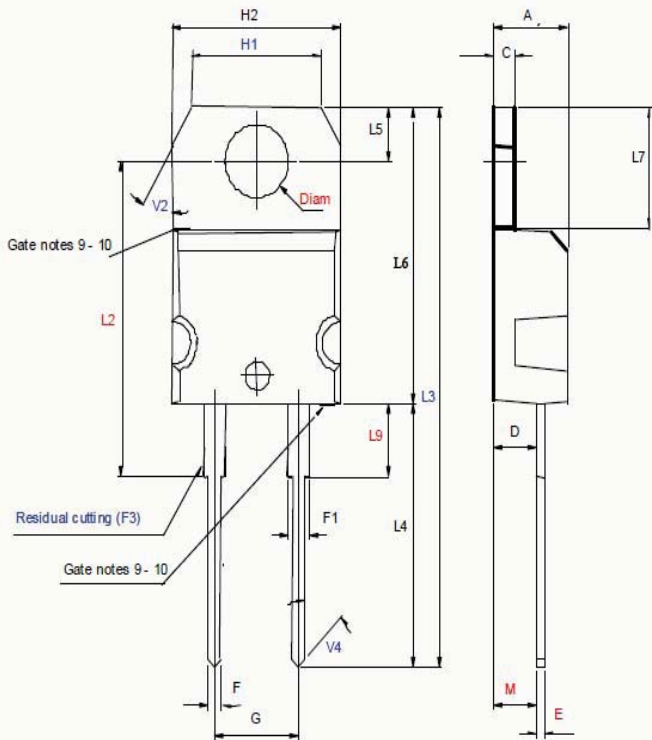

DIM	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	4.4	4.6	0.173	0.181
C	1.23	1.32	0.048	0.052
D	2.4	2.72	0.094	0.107
E	0.49	0.7	0.019	0.028
F	0.61	0.88	0.024	0.035
F1	1.14	1.7	0.045	0.067
F3		1		0.039
G	4.95	5.15	0.195	0.203
H1	7.7	7.9	0.303	0.311
H2	10	10.4	0.394	0.409
L2	16.4		0.646	
L3	28.9		1.138	
L4	13	14	0.512	0.551
L5	2.65	2.95	0.104	0.116
L6	15.25	15.75	0.600	0.620
L7	6.2	6.6	0.244	0.260
L9	3.5	3.93	0.138	0.155
M	2.6			
V	5°			
V2	30°			
V4	45°			
diam	3.75	3.85	0.148	0.152

DISCLAIMER NOTICE

Rectron Inc reserves the right to make changes without notice to any product specification herein, to make corrections, modifications, enhancements or other changes. Rectron Inc or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies. Data sheet specifications and its information contained are intended to provide a product description only. "Typical" parameters which may be included on RECTRON data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. Rectron Inc does not assume any liability arising out of the application or use of any product or circuit.

Rectron products are not designed, intended or authorized for use in medical, life-saving implant or other applications intended for life-sustaining or other related applications where a failure or malfunction of component or circuitry may directly or indirectly cause injury or threaten a life without expressed written approval of Rectron Inc. Customers using or selling Rectron components for use in such applications do so at their own risk and shall agree to fully indemnify Rectron Inc and its subsidiaries harmless against all claims, damages and expenditures.