
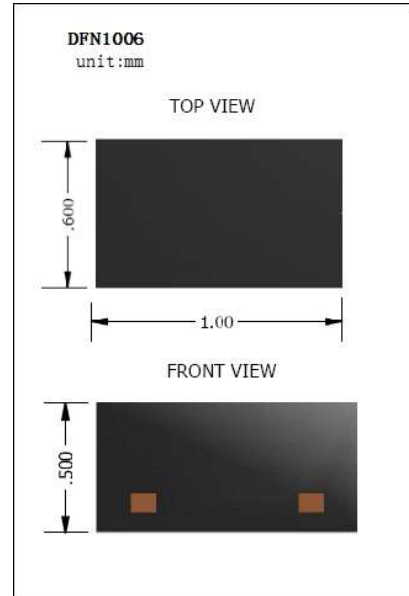


ZENER DIODE

- ◇ Planar Die construction
- ◇ 250mW Power Dissipation
- ◇ Zener Voltages from 2.4V–75V
- ◇ RoHS compliant / Green EMC
- ◇ P/N suffix V means Halogen-free
- ◇ P/N suffix V means AEC-Q101 qualified, e.g:BZX884C2V4V

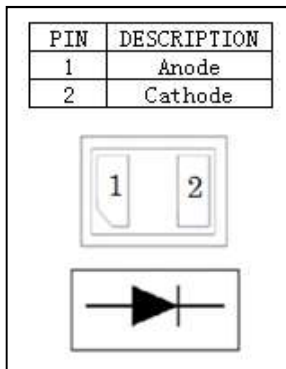

**MAXIMUM RATINGS (Ta = 25 °C)**

Symbol	Parameter	Value	Units
V <sub>F</sub>	Maximum Forward Voltage @ IF=10mA	0.9	V
P <sub>(AV)</sub>	Power Dissipation	250	mW
T <sub>J</sub> , Tstg	Operating And Storage Temperature	-55 to 150	°C
I <sub>FSM</sub>	Peak Forward Surge Current	2.0	A
Tstg	Storage Temperature Range	-55 to 150	°C
R <sub>j</sub>	Thermal Resistance Junction to Ambient	417	°C/W








**ELECTRICAL CHARACTERISTICS (Ta = 25 °C unless otherwise noted)**

Type	Device	V <sub>Z</sub> (V) *1			I <sub>ZT</sub>	Z <sub>ZT</sub> @I <sub>ZT</sub>	Z <sub>ZK</sub> @I <sub>ZK</sub>	I <sub>zk</sub>	I <sub>R</sub>	V <sub>R</sub>
		Nom(V)	Min(V)	Max(V)						
BZX884C2V4V	B1	2.4	2.28	2.52	5	100	400	1	50	1
BZX884C2V7V	B2	2.7	2.57	2.84	5	100	450	1	20	1
BZX884C3V0V	B3	3	2.85	3.15	5	95	500	1	10	1
BZX884C3V3V	B4	3.3	3.14	3.47	5	95	500	1	5	1
BZX884C3V6V	B5	3.6	3.42	3.78	5	90	500	1	5	1
BZX884C3V9V	B6	3.9	3.71	4.1	5	90	500	1	3	1
BZX884C4V3V	B7	4.3	4.09	4.52	5	90	600	1	3	1

Type	Device	V <sub>Z</sub> (V) *1			I <sub>ZT</sub>	Z <sub>ZT</sub> @I <sub>ZT</sub>	Z <sub>ZK</sub> @I <sub>ZK</sub>	I <sub>ZK</sub>	I <sub>R</sub>	V <sub>R</sub>
Number	Marking	Nom(V)	Min(V)	Max(V)	mA	Ω		(mA)	(μA)	(V)
BZX884C4V7V	B8	4.7	4.47	4.94	5	80	500	1	3	2
BZX884C5V1V	B9	5.1	4.85	5.36	5	60	480	1	2	2
BZX884C5V6V	BA	5.6	5.32	5.88	5	40	400	1	1	2
BZX884C6V2V	BB	6.2	5.89	6.51	5	10	150	1	3	4
BZX884C6V8V	BC	6.8	6.46	7.14	5	15	80	1	2	4
BZX884C7V5V	BD	7.5	7.13	7.88	5	15	80	1	1	5
BZX884C8V2V	BE	8.2	7.79	8.61	5	15	80	1	0.7	5
BZX884C9V1V	BF	9.1	8.65	9.56	5	15	100	1	0.5	6
BZX884C10 V	BG	10	9.5	10.5	5	20	150	1	0.2	7
BZX884C11V	BH	11	10.45	11.55	5	20	150	1	0.1	8
BZX884C12V	BJ	12	11.4	12.6	5	25	150	1	0.1	8
BZX884C13V	BK	13	12.35	13.65	5	30	170	1	0.1	8
BZX884C15V	BL	15	14.25	15.75	5	30	200	1	0.05	10.5
BZX884C16V	D1	16	15.2	16.8	5	40	200	1	0.05	11.2
BZX884C18V	D2	18	17.1	18.9	5	45	225	1	0.05	12.6
BZX884C20V	D3	20	19	21	5	55	225	1	0.05	14
BZX884C22V	D4	22	20.9	23.1	5	55	250	1	0.05	15.4
BZX884C24V	D5	24	22.8	25.2	5	70	250	1	0.05	16.8
BZX884C27V	D6	27	25.65	28.35	2	80	300	0.5	0.05	18.9
BZX884C30V	D7	30	28.5	31.5	2	80	300	0.5	0.05	21
BZX884C33V	D8	33	31.35	34.65	2	80	325	0.5	0.05	23.1
BZX884C36V	D9	36	34.2	37.8	2	90	350	0.5	0.05	25.2
BZX884C39V	DA	39	37.05	40.95	2	130	350	0.5	0.05	27.3
BZX884C43V	DB	43	40.85	45.15	2	150	375	0.5	0.05	30.1
BZX884C47V	DD	47	44.65	49.35	2	170	375	0.5	0.05	32.9
BZX884C51V	DD	51	48.45	53.55	2	180	400	0.5	0.05	35.7
BZX884C56V	DE	56	53.2	58.8	2	200	425	0.5	0.05	39.2
BZX884C62V	DF	62	58.9	65.1	2	215	450	0.5	0.05	43.4
BZX884C68V	DG	68	64.6	71.4	2	240	475	0.5	0.05	47.6
BZX884C75V	DH	75	71.25	78.75	2	255	500	0.5	0.05	52.5

\*1 Pulse width = 10 ms

# RATING AND CHARACTERISTICS CURVES (BZX884C2V4V THRU BZX884C75V)

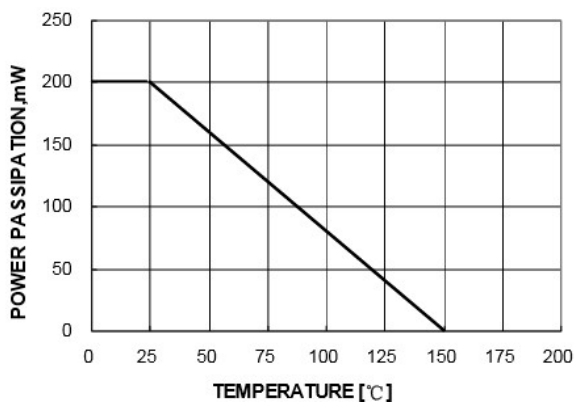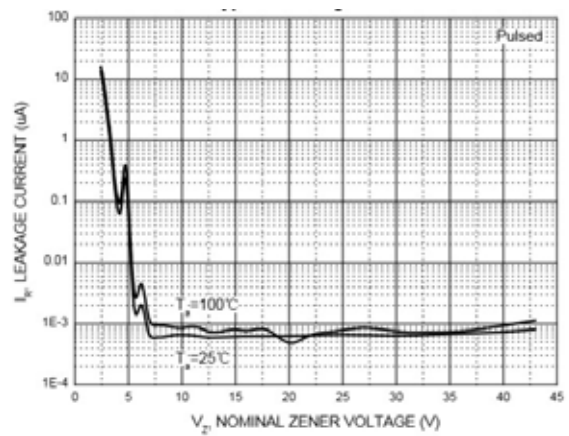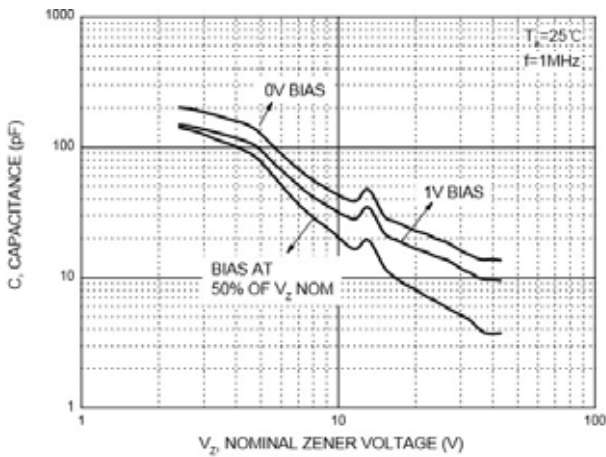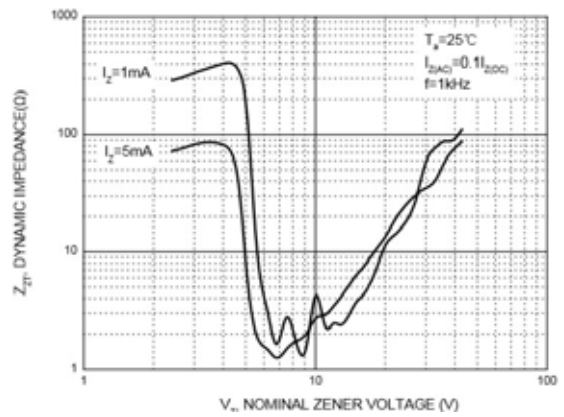
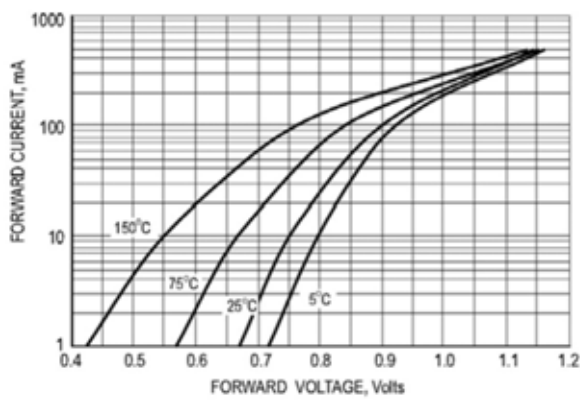
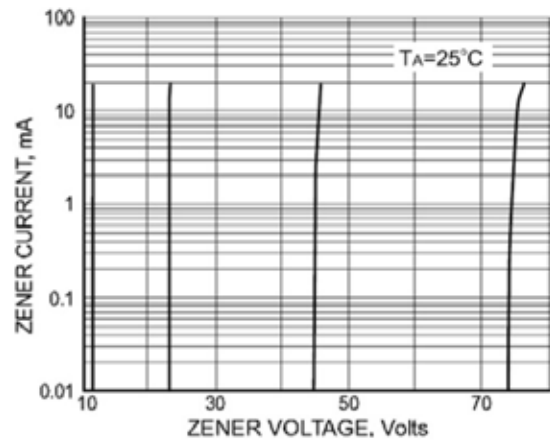
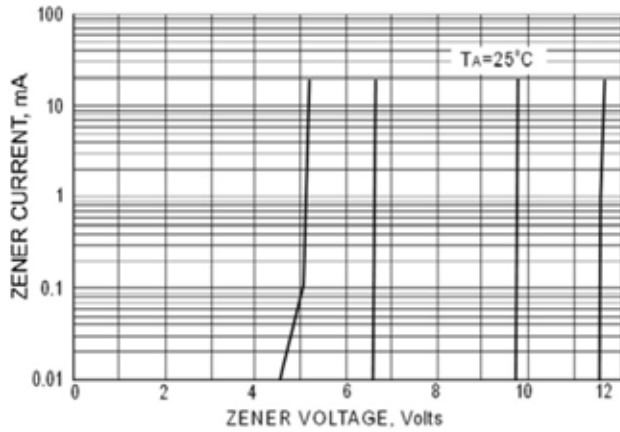


## ORDERING INFORMATION

Device	Package	Shipping	Tape wide	Emboss pitch	Tape specification	Package Code
BZX884C2V4V -BZX884C75V	DFN1006	Tape & Reel 10000pcs /7" Reel	8mm	4mm	Conductive	-T

## PACKAGE DIMENSIONS

Package outline : DFN1006

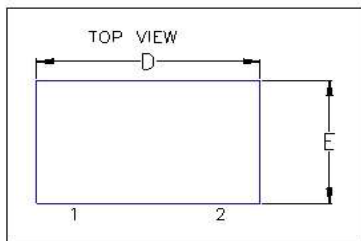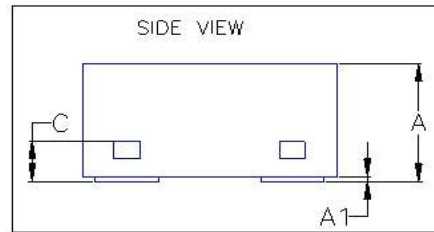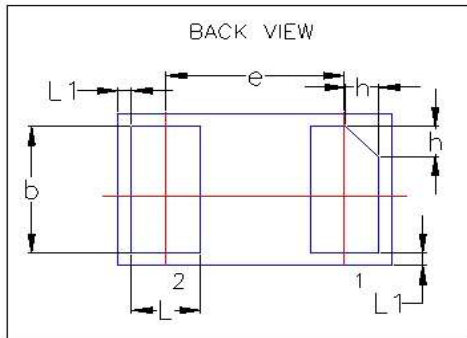

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	0.45	0.50	0.55
A1	0.00	0.02	0.05
b	0.45	0.50	0.55
C	0.12	0.15	0.18
D	0.95	1.00	1.05
e	0.65BSC		
E	0.55	0.60	0.65
L	0.20	0.25	0.30
L1	0.05 REF.		
h	0.07	0.12	0.17

1. Lead plating: Pb free solder
2. Lead thickness includes solder plating
3. Lead frame: Copper A194
4. Other Tolerance:  $\pm 0.05$
6. Dimensions are exclusive of Burrs, Mold Flash and Tie Bar extrusions
5. Unit: mm

## DISCLAIMER NOTICE

Rectron Inc reserves the right to make changes without notice to any product specification herein, to make corrections, modifications, enhancements or other changes. Rectron Inc or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies. Data sheet specifications and its information contained are intended to provide a product description only. "Typical" parameters which may be included on RECTRON data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. Rectron Inc does not assume any liability arising out of the application or use of any product or circuit.

Rectron products are not designed, intended or authorized for use in medical, life-saving implant or other applications intended for life-sustaining or other related applications where a failure or malfunction of component or circuitry may directly or indirectly cause injury or threaten a life without expressed written approval of Rectron Inc. Customers using or selling Rectron components for use in such applications do so at their own risk and shall agree to fully indemnify Rectron Inc and its subsidiaries harmless against all claims, damages and expenditures.